FILT'RAY 2G 1-month shower filter

Ref. AT030711

Sterile



DESCRIPTION

FILT'RAY 2G 1-month shower filter

Ref. AT030711

AQUATOOLS anti-Legionella and anti-germ shower filter.
Device: ABS.
Membrane type: tubular microfiltration.
Membrane: polyethylene.
Molecular weight cut-off: 0.1 µm nominal and 0.2 µm absolute sterilizing grade.
Filtration flow rate: 2.6 gal/min at 43.5 psi and 1.0 gal/min at 14.5 psi (filter only, excludes any flow rate restriction in the shower).
Maximum upstream pressure at the point-of-use: 72.5 psi.
Maximum lifespan: 1 month from installation.
Thermal shock resistance: 158°F for 30 minutes.
Chemical shock resistance: active chlorine levels of up to 100 ppm for 1 hour (cumulative total).
Sterile filter.
FILT'RAY 2G sterile disposable water filters are:
CE marked Class I Medical Devices in Europe that comply with directive 93/42/CEE;
Class II Medical Devices in the U.S.A. with FDA-510(K) clearance;
Class I Medical Devices in Canada that comply with SOR/98-282.
Box of 10. Each filter is individually wrapped and sterile.


ADVANTAGES

- Anti-Legionella and anti-germ
- Lifespan: 1 month from installation
- Bubl'air Wash: longer filter life
- Rapid installation with no tools required

TECHNICAL CHARACTERISTICS

FILT'RAY 2G 1-month shower filter - Ref. AT030711

Technology	Point-of-use filtration
Height	2.76 in; 70 mm
Length	8.86 in; 225 mm
Flow rate	2.6 gal/min at 43.5 psi, 1.0 gal/min at 14.5 psi; 11.9 lpm at 3 bar, 4.5 lpm at 1 bar
Lifespan	1 month
Norms	ACS CE WRAS

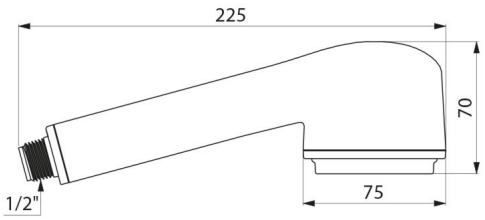

© AQUATOOLS