Sediment filter, 5µm

Ref. AT50680

6 months



DESCRIPTION

Sediment filter, 5µm

Ref. AT50680

PREFILT 5µm sediment filter.
Retains particles larger than 5µm.
Filter cartridge can be replaced without changing the filter body.
Membrane surface area: 19.6" (0.5m²).
Capacity: 4,755 Gallons (18,000L).
Maximum lifespan: 6 months.
Filtration flow rate: 2.37 gpm (9 lpm) with integrated flow restrictor; 3.7 gpm (14 lpm) without flow restrictor at 45 psi (3 bar).
Materials: Body and filtration cartridge made of polypropylene. Filter cartridge plastic components made of ABS.
Temperature: 39 - 100°F (4 - 38°C).
Operating pressure: 7 - 145 psi (0.5 - 10 bar).
Connection type: 3/8" compression or NPT.
Compatible with and resistant to chemical shocks (active chlorine levels up to 100 ppm for 1 hour (cumulative total) and thermal shocks (158°F / 70°C for 30 minutes).

ADVANTAGES


Lifespan: 6 months after installation

Sediment filter

TECHNICAL CHARACTERISTICS

Sediment filter, 5µm - Ref. AT50680

Supply	3/8" compression or NPT
Length	13.2" (335mm)
Flow rate	2.37 gpm (9 lpm) with integrated flow restrictor; 3.7 gpm (14 lpm) without flow restrictor at 45 psi (3 bar)
Diameter	3.2" (82mm)
Lifespan	6 months
Norms	ACS WRAS

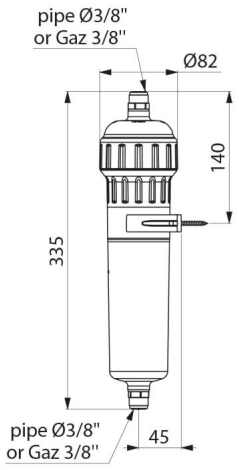

© AQUATOOLS