FILT&SWAP Inline filter

Ref. AT50670

Active charcoal and 0.2µm microfiltration



DESCRIPTION

FILT&SWAP Inline filter

Ref. AT50670

FILT&SWAP duo inline anti-Legionella filter: active charcoal and 0.2µm microfiltration.
Active charcoal: reduces taste, smells and chlorine in water.
Microfiltration: retains all bacteria and other particles larger than 0.2 µm.
Filter cartridge can be replaced without changing the filter body.
Membrane surface area: 0.5m².
Capacity: 4,755 Gallons (18,000L).
Maximum lifespan: 6 months.
Filtration flow rate: 2.37 gpm (9 lpm) with integrated flow restrictor; 3.7 gpm (14 lpm) without flow restrictor at 45 psi (3 bar).
Materials: Polypropylene body. ABS plastic parts of the filter cartridge. Polyethylene microfiltration cartridge.
Temperature: 39 - 100°F (4 - 38°C).
Operating pressure: 7 - 145 psi (0.5 - 10 bar).
Connection: 3/8" compression or NPT.
Compatible with and resistant to chemical shocks (active chlorine levels up to 100 ppm for 1 hour (cumulative total) and thermal shocks (158°F / 70°C for 30 minutes).


ADVANTAGES

- Anti-Legionella
- 6 months

TECHNICAL CHARACTERISTICS

FILT&SWAP Inline filter - Ref. AT50670

Supply	3/8" compression or NPT.
Length	13.2" (335mm)
Flow rate	2.37 gpm (9 lpm) with integrated flow restrictor; 3.7 gpm (14 lpm) without flow restrictor at 45 psi (3 bar)
Diameter	3.2" (82mm)
Lifespan	6 months
Norms	ACS WRAS

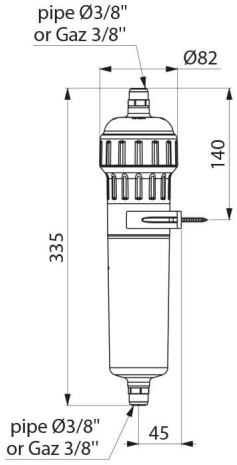

© AQUATOOLS